HALO DEFENDER LIMITED WARRANTY

WHAT YOUR WARRANTY COVERS

The HALO DEFENDER is warrantied to the original owner at the original residential installation location to be free from defects in materials and workmanship from the date of manufacturing as specified. The Defender housing is warrantied for ten years. Replacment cartridges are not covered under warranty. If the Defender was purchased from a 3rd party, liquidator or by any means other than an authorized licensed wholesale distributor, the warranty is void.

- 1. HALO will provide replacement filter housing for any filter housing that fails due to a manufacturing defect.
- 2. HALO Warranties that components for the equipment will be available for the lifetime of the system.
- 3. HALO will provide comparable components of our selection to replace any obsolete items.
- 4. This warranty gives you specific legal rights that may vary from state to state.

CONDITIONS OF WARRANTY

- 1. The system must be installed and maintained according to local codes and secondarily in accordance with manufacturer recommendations. Contact HALO if there are any conflicts between local codes and our printed instructions.
- 2. The system must be maintained with HALO approved replacement components.
- 3. Failures resulting from fire, freezing, neglect, accident, alteration, abuse, improper installation or acts of nature are not covered.
- 4. Water Pressure must be regulated between 40 and 80 pound per square inch working or static pressure. Pressure exceeding 80 pounds per square inch working or static pressure voids all warranty.
- 5. Air temperature exceeding 120 degrees Fahrenheit voids warranty on filter housings. Influent chlorine must not exceed 1mg/l
- 6. HALO does not warranty to perform, pay for, or finance any repairs and/or installations. The customer must contact the HALO representative.

OBTAINING WARRANTY SERVICE

WARNING: Do not use with water that is microbiological unsafe or of unknown quality without adequate disinfection before or after the system. Intended for use treatment of cold water only. Do not exceed 80 psi. Intended for residential use only.

NOTE: The HALO filtration systems are intended for treatment of potable water provided by municipal water providers. While the HALO Filtration Systems may be effective for treatment of well water it is vital that a well water quality analysis be provided for review and recommendation in to ensure that optimum results can be realized. Failure to provide a current well water report to HALO Water Systems for analysis and recommendation voids all warranties.

All returns must be accompanied by a "Return Authorization" (RMA) number, all defective warrantied parts along with a copy of this warranty. Original proof of purchase receipt and the RMA number. We will at our option, repair or provide replacement warrantied parts at no cost. Except freight and on site labor charges. You can contact us at 800-591-0538 or email us at service@halowater.com

LIMITS AND EXCLUSIONS


This warranty is exclusive and in lieu of any other warranty expressed or implied. Including but not limited to any implied warranty of merchantability of fitness for particular purpose. HALO shall not be liable for any loss or incidental or consequential damages resulting from the misuse



HALO Mini Series

Installation Instructions

MINI 2

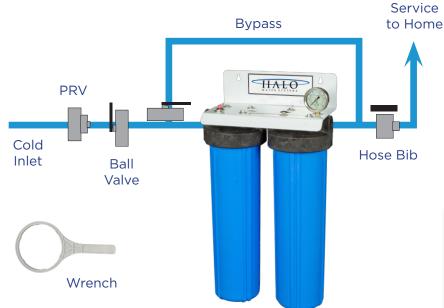

Includes:

Fully assembled system - cartridges, filter wrench, extra o-rings and complete installation and maintenance guide.

Dimensions: 30" h x 15" w x 9" d **Shipping Weight:** approx. 35 lbs.

Inlet/Outlet: 1" threaded

Rated Flow: effective up to 8 GPM

with a 15 GPM max. flow.

Capacity: approx. 70,000 gals.

Replacement Filters:

MH-RC-1: Sediment Cartridge MH-RC-2: HAC Carbon Cartridge






STAGE 15 MIC. SEDIMENT

STAGE 2
HAC CARBON

MINI 3

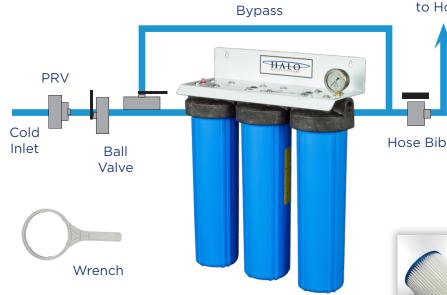

Includes:

Fully assembled system - cartridges, filter wrench, extra o-rings and complete installation and maintenance guide.

Service to Home

Dimensions: 30" h x 23" w x 9" d Shipping Weight: approx. 45 lbs. Inlet/Outlet: 1" threaded

Rated Flow: effective up to 8 GPM

with a 15 GPM max. flow. **Capacity:** approx. 70,000 gals.

Replacement Filters:

MH-RC-1: Sediment Cartridge MH-RC-2: HACCarbon Cartridge



STAGE 1 5 MIC. SEDIMENT



STAGE 2 HAC CARBON



PERMANENT

STAGE 3ION Scale Inhibitor