



LEARN MORE



**COMPLETE WATER HEATER PROTECTION**  
**Sediment Filter and Scale Inhibitor for Tank and Tankless Water Heaters**



## DUAL STAGE TREATMENT

- 💧 **Industry leading 12.5 GPM**
- 💧 **Inhibits scale and corrosion**
- 💧 **Saves money**
- 💧 **Cleaner dishes and glassware**
- 💧 **Zero electricity**
- 💧 **Zero backwash**

## HOW IT WORKS

Finally, a cost effective way to minimize lime scale damage and corrosion and extend the life of the water heating systems and appliances.

The system works by using a high capacity filter that removes silt, dirt, rust and sediment. The water then passes through our proprietary scale inhibitor chamber to inhibit minerals from adhering to water heaters, fixtures and appliances.

**Note:** Includes a pressure relief system for easy filter changes and a high quality liquid filled pressure gauge with high pressure indicator red zone.

1. Mount filter and housing to wall using appropriate hardware. Mounting to a stud is preferred.
2. Plumb cold water feed to the inlet of the filter.
3. Plumb outlet of filter to inlet of tank or tankless water heater.
4. Slowly pressurize the filter and monitor water pressure. If the pressure exceeds 80 psi, stop and install a pressure regulator.
5. Carefully inspect system for leaks. Do not over tighten.

**Please Note:** HALO Guardian is rated for cold water treatment only.

## HEATER GUARDIAN - HG-75

**Note:** HALO Heater Guardian is rated for cold water treatment only. Install on the cold water inlet of water heater.

If recirculating loop is present, you must install a check valve to prevent thermal expansion into Guardian.



### HALO Heater Guardian - HG-75


Dimensions	15" H X 5" W x 6" D
Weight	Approx. 6.2 LBS
In/Outlet	.75" NPT
Rated Flow	Effective up to 12.5 GPM
Capacity	Up to 50,000 Gallons

### REPLACEMENT CARTRIDGE:

Model HG-RC-75 Heater Guardian Cartridge

### Includes:

Disassembled system - cartridge, filter wrench, extra o-rings and complete installation guide.

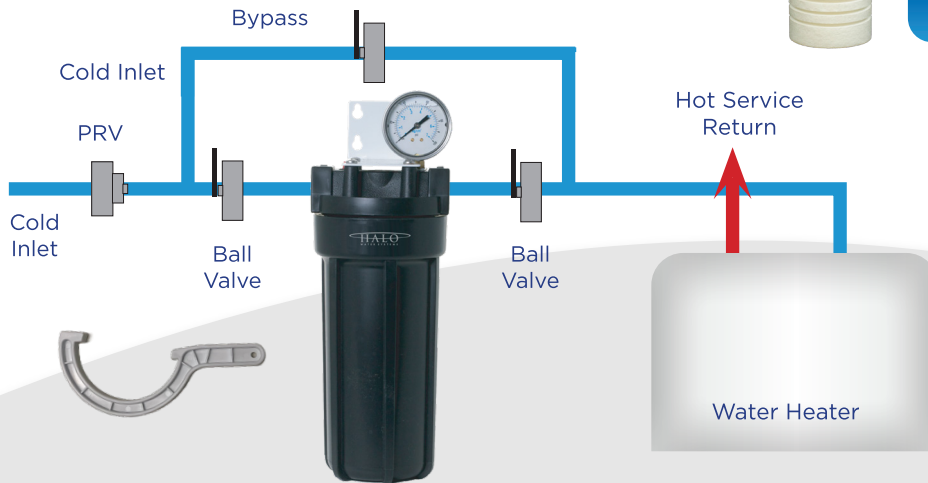

## HEATER GUARDIAN - HG-100

**Note:** HALO Heater Guardian is rated for cold water treatment only. Install on the cold water inlet of water heater.

If recirculating loop is present, you must install a check valve to prevent thermal expansion into Guardian.



### HALO Heater Guardian - HG-100

Dimensions	18" H x 7" W x 8" D
Weight	Approx. 13.4 LBS
In/Outlet	1" NPT
Rated Flow	Effective up to 22.5 GPM
Capacity	Up to 75,000 Gallons

### REPLACEMENT CARTRIDGE:

Model HG-RC-100 Heater Guardian Cartridge

### Includes:

Disassembled system - cartridge, filter wrench, extra o-rings and complete installation guide.

