



Scan code for more information.



Two Stage Under Counter Water Filtration System

Hydro Point™ incorporates two multi-stage water filtration cartridges designed to provide you with cleaner, safer, drinking water. With minimal maintenance you will have premium quality water at your fingertips, 24 hours a day, 7 days a week!

CARTRIDGE 1

Stage 1

The Hydro Point™ sediment prefilter is a specially manufactured high performance 5 micron sediment filter designed for high dirt holding capacity, and sediment and rust particle reduction. Its micro-fine web design traps more particles and helps extend the life of additional filters in the filtration system keeping them working at optimal performance.

Stage 2

Hydro Point™ Radial Flow Filtration allows water to enter the cartridge through the radius of the filter. This allows the outer layer to trap and retain particulate matter 1 micron in size or larger. The FDA CFR 21 compliant fine web polypropylene fibers do not impart color, odor or chemicals into the water and offer exceptional performance.

CARTRIDGE 2

Water passes through the Coconut Shell Solid Carbon Block filter to reduce items of health concern. The .5 micron carbon block pores micro-strain the water to reduce substances in your water that are .5 micron in size or larger. The .5 micron pores also aid to increase the systems adsorptive properties. This allows water to have a longer contact time with the carbon wall and permits the efficient reduction of volatile organic compounds (VOC's), PCB, pesticides, herbicides, cc0hloroform and other chlorination by-products.

Hydro Point® also incorporates throughout the solid carbon filter an antimicrobial technology that inhibits the growth of bacteria that can cause odors and fouling of the filter surface, so your filter keeps working at peak performance. On an unprotected surface, bacteria can double in number every 20 minutes causing premature fouling of the water filter. The antimicrobial product protection works continuously to inhibit the growth of bacteria that can adversely affect filter performance.


Features

- Smart Faucet **Tells you when to change filters!**
- Filters down to .5 microns
- VOC, pesticides, herbicides reduction
- Can be plumbed to kitchen faucet
- Air hammer arrestor
**Extends the life of equipment
& protects the home and family**
- HALO leak detector
- Easy installation



Piece of Mind

HALO Protection Valve Shuts off water if a leak is detected!

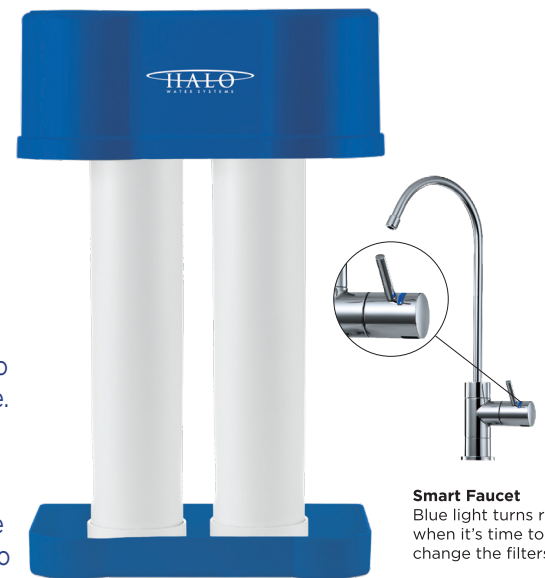

H-HYDRO

Smart Faucet
Blue light turns red when it's time to change the filters!

Can be plumbed to cold line on kitchen sink!

System Part #: H-HYDRO

Replacement Filter: H-HYDRO-KIT

Micron Rating: .5 micron

Maximum Working Pressure: 80 psi

Minimum Working Pressure: 30 psi

Maximum Operating Temperature: 100° F

Minimum Operating Temperature: 40° F



Limited Two Year Warranty

1. Warranty Covers

Hydro Point™ filtration system is warranted to the original owner to be free of defects in material and workmanship from the date of manufacture for two years as follows:

- 1) The manufacture will replace the defective parts (excluding the replaceable filters) within two years at no charge.
- 2) The replaceable filters are warranted for defects in material and workmanship only. Service life of replaceable filter varies with local water and is thus not warranted. It is recommended to replace the under counter filtration system every ten (10) years.

2. Warranty Does Not Cover

- 1) System must be maintained and service with manufacturer approved replacement parts. The performance and function of the filtration system is directly related to the quality of the water being treated and the particular application in which it is used. Therefore, the manufacturer liability is limited to the cost of repair or replacement of any defective part and does not include incidental or consequential damages of any kind. This warranty gives you special legal rights and you may also have other rights which vary from state to state.
- 2) Systems must be installed and operated in accordance with manufacturer recommended procedures and guidelines.

3. Filtration system warranty conditions

- 1) Warranty is void if product failure or damage result from freezing, neglect, misapplication, fouling with sediment or scale or failure to operate the system in accordance with the instructions contained in the owner's manual.
- 2) The following operating conditions must also be followed for this warranty to be valid.
- 3) Warranty void if system is not installed by a licensed contractor.

Operating pressure:	40-80 PSI
Operating temperature:	40-100 ° F
TDS:	<1000 ppm
pH Range:	3 - 11
Iron:	<0.3 ppm

4. Limitations and exclusions

The manufacturer will not be responsible for any implied warranties including those of merchant ability and fitness for a particular purpose. The manufacturer will not be responsible for any incidental or consequential damages including travel expense, telephone charges, loss of revenue, loss of time, inconvenience, loss of use of the equipment and damage caused by the equipment and its failure to function properly. If a HALO Hydro Point™ filtration system was purchased from a 3rd party, liquidator or by any means other than an authorized licensed wholesale distributor, the warranty is void. This warranty sets forth all of manufacturer's responsibilities regarding this equipment. Failure to provide a current well water report to HALO Water Systems for analysis and recommendation voids all warranties.