

HALO HEATER GUARDIAN LIMITED WARRANTY

WHAT YOUR WARRANTY COVERS

The HALO Heater Guardian Whole House Water Systems are warranted to the original owner at the original residential installation location to be free from defects in materials and workmanship from the date of manufacturing as specified for a period of one (1) year. If the Heater Guardian system was purchased from a 3rd party, liquidator or by any means other than an authorized licensed wholesale distributor, the warranty is void.

1. HALO will provide replacement filter housing for any filter housing that fails due to a manufacturing defect.
2. HALO Warranties that components for the equipment will be available for the lifetime of the system.
3. HALO will provide comparable components of our selection to replace any obsolete items.
4. This warranty gives you specific legal rights that may vary from state to state.

CONDITIONS OF WARRANTY

1. The system must be installed and maintained according to local codes and secondarily in accordance with manufacturer recommendations. Contact HALO if there are any conflicts between local codes and our printed instructions.
2. The system must be maintained with HALO approved replacement components.
3. Failures resulting from fire, freezing, neglect, accident, alteration, abuse, improper installation or acts of nature are not covered.
4. Water Pressure must be regulated between 40 and 80 pound per square inch working or static pressure. Pressure exceeding 80 pounds per square inch working or static pressure voids all warranty.
5. Water temperature range must be between 33 degrees to 120 degrees. Do not allow to freeze.
6. Replace sump every 3 years.
7. Air temperature exceeding 120 degrees Fahrenheit voids warranty on filter housings. Internal temperature below 30 degrees and exceeding 120 degrees • Fahrenheit voids warranty on filter housings. Influent chlorine must not exceed 1mg/l
8. HALO does not warranty to perform, pay for, or finance any repairs and/or installations. The customer must contact the HALO representative.
9. If a recirculation pump is in use at the location of the HALO install a secondary conditioner must be installed in order to ensure optimum results.
10. Using a filter housing wrench not provided by HALO Water Systems can damage the integrity of the filter housing and voids all warranty.
11. Proper precautions must be taken when installing the system near objects that can be damaged by water. HALO Water Systems, LLC accepts no responsibility for water damage or loss of property due to water damage. In areas of high risk of water damage, the use of a water protection device is recommended.

OBTAINING WARRANTY SERVICE

WARNING: Do not use with water that is microbiological unsafe or of unknown quality without adequate disinfection before or after the system. Intended for use treatment of cold water only. Do not exceed 80 psi. Intended for residential use only.

NOTE: The HALO filtration systems are intended for treatment of potable water provided by municipal water providers. While the HALO Filtration Systems may be effective for treatment of well water it is vital that a well water quality analysis be provided for review and recommendation in to ensure that optimum results can be realized. Failure to provide a current well water report to HALO Water Systems for analysis and recommendation voids all warranties. All filtration systems contain other parts that have a limited service life. To prevent costly repairs or possible water damage we strongly recommended that the bowl or sump of all plastic housings be replace periodically: every 5 years for clear sumps and every 4 years for opaque sumps. If your sump has been in use for more than the recommended period, it should be replaced immediately. Be sure to date any new replacement sump for future reference and indicate the next recommended replacement date.

All returns must be accompanied by a "Return Authorization" (RMA) number, all defective warranted parts along with a copy of this warranty. Original proof of purchase receipt and the RMA number. We will at our option, repair or provide replacement warranted parts at no cost. Except freight and on site labor charges. You can contact us at 800-591-0538 or email us at service@halowater.com

LIMITS AND EXCLUSIONS

This warranty is exclusive and in lieu of any other warranty expressed or implied. Including but not limited to any implied warranty of merchantability of fitness for particular purpose. HALO shall not be liable for any loss or incidental or consequential damages resulting from the misuse.

- Adding a check valve for hot water flow is recommended.

HALO HEATER GUARDIAN ELITE HGE-75


Note: HALO Heater Guardian is rated for cold water treatment only. Install on the cold water inlet of water heater.

If recirculating loop is present, you must install a check valve to prevent thermal expansion into Guardian.



Dimensions	15"H X 5"W x 6"D
Weight	Approx. 6.2 LBS
In/Outlet	.75" NPT
Rated Flow	Effective up to 12.5 GPM

REPLACEMENT CARTRIDGE:
Model HG-RC-75 Heater Guardian Cartridge

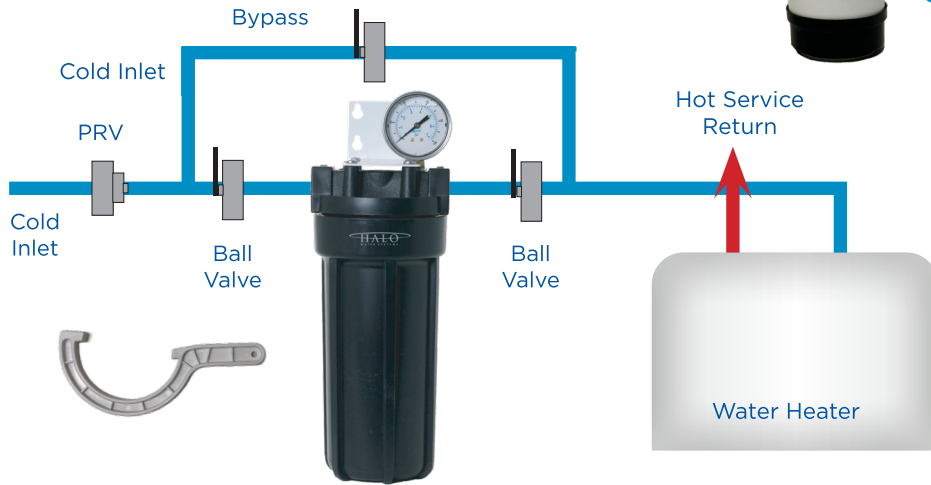

Includes:
Disassembled system - cartridge, filter wrench, extra o-rings and complete installation guide.

HALO HEATER GUARDIAN ELITE HGE-100


Note: HALO Heater Guardian is rated for cold water treatment only. Install on the cold water inlet of water heater.

If recirculating loop is present, you must install a check valve to prevent thermal expansion into Guardian.



HALO Heater Guardian - HG-100	
Dimensions	18" H x 7" W x 8" D
Weight	Approx. 13.4 LBS
In/Outlet	1" NPT
Rated Flow	Effective up to 22.5 GPM

REPLACEMENT CARTRIDGE:
Model HG-RC-100 Heater Guardian Cartridge

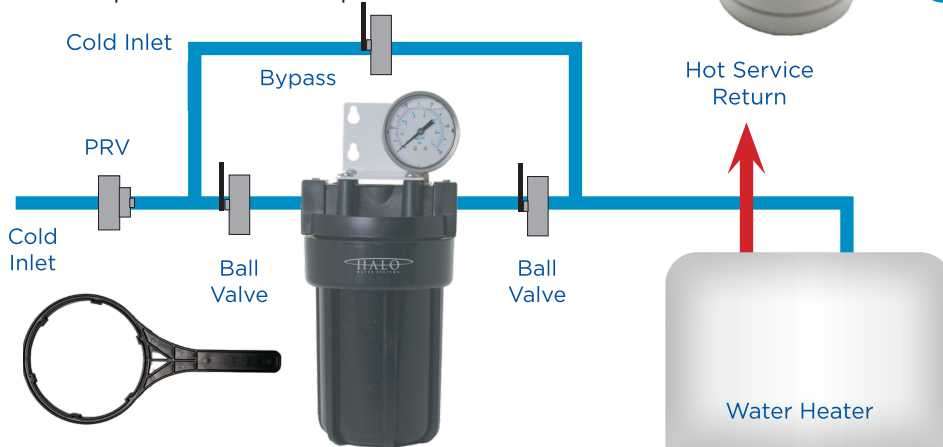

Includes:
Disassembled system - cartridge, filter wrench, extra o-rings and complete installation guide.