



LIMITED LIABILITY WARRANTY

The HALO Sediment Guard systems are warranted to the original owner at the original residential installation location to be free from defects in materials and workmanship from the date of manufacturing as specified. If the HALO Sediment Guard system was purchased from a 3rd party, liquidator or by any means other than an authorized licensed wholesale distributor, the warranty is void.

1. HALO will provide replacement filter housing for any filter housing that fails due to a manufacturing defect.
2. HALO Warranties that components for the equipment will be available for the lifetime of the system (1 year).
3. HALO will provide comparable components of our selection to replace any obsolete items.
4. This warranty gives you specific legal rights that may vary from state to state.

CONDITIONS OF WARRANTY

1. The system must be installed and maintained according to local codes and secondarily in accordance with manufacturer recommendations. Contact HALO if there are any conflicts between local codes and our printed instructions.
2. The system must be maintained with HALO approved replacement components.
3. Cartridges are replaceable (service items) and not covered under warranty.
4. Failures resulting from fire, freezing, neglect, accident, alteration, abuse, improper installation or acts of nature are not covered.
5. Water Pressure must be regulated between 40 and 80 pound per square inch working or static pressure. Pressure exceeding 80 pounds per square inch working or static pressure voids all warranty.
6. Air temperature exceeding 120 degrees Fahrenheit voids warranty on filter housings. Influent chlorine must not exceed 1mg/l
7. HALO does not warranty to perform, pay for, or finance any repairs and/or installations. The customer must contact the HALO representative.
8. If a recirculation pump is in use at the location of the HALO install a secondary conditioner must be installed in order to ensure optimum results.

OBTAINING WARRANTY SERVICE

WARNING: Do not use with water that is microbiological unsafe or of unknown quality without adequate disinfection before or after the system. Intended for use treatment of cold water only. Do not exceed 80 psi. Intended for residential use only.

NOTE: The HALO filtration systems are intended for treatment of potable water provided by municipal water providers. While the HALO Filtration Systems may be effective for treatment of well water it is vital that a well water quality analysis be provided for review and recommendation in to ensure that optimum results can be realized. Failure to provide a current well water report to HALO Water Systems for analysis and recommendation voids all warranties. All filtration systems contain other parts that have a limited service life. To prevent costly repairs or possible water damage we strongly recommended that the bowl or sump of all plastic housings be replace every 3 years. If your sump has been in use for more than the recommended period, it should be replaced immediately. Be sure to date any new replacement sump for future reference and indicate the next recommended replacement date.

All returns must be accompanied by a "Return Authorization" (RMA) number, all defective warranted parts along with a copy of this warranty. Original proof of purchase receipt and the RMA number. We will at our option, repair or provide replacement warranted parts at no cost. Except freight and on site labor charges. You can contact us at 800-591-0538 or email us at service@halowater.com




INSTALLATION INSTRUCTIONS

Note: HALO Sediment Guard is rated for cold water treatment only. Install on the cold water inlet of water heater.

If recirculating loop is present, you must install a check valve to prevent thermal expansion into SC510.



H-SG-510
Dimensions 23.75 x 7.75
Filters are 4.5 diameter
H-SGRC-510
Replacement Filter

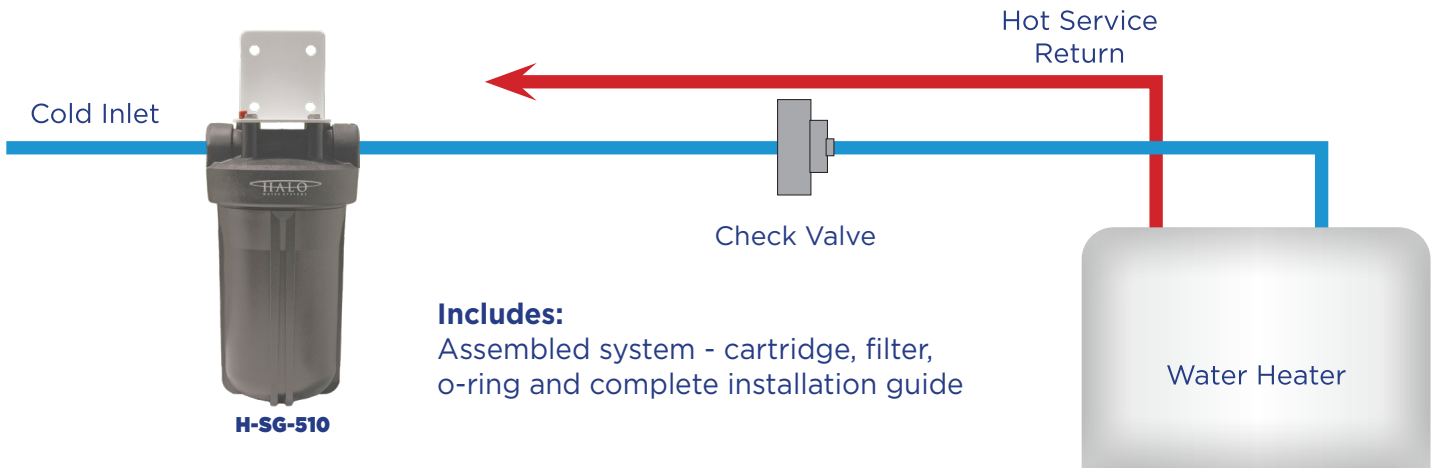


Includes:
Assembled system - cartridge, filter, o-ring and complete installation guide

Note: HALO SC520 is rated for cold water treatment only. Install on the cold water inlet of water heater.

If recirculating loop is present, you must install a check valve to prevent thermal expansion into SC520.



H-SG-520
Dimensions 18 x 7.75 F
Filters are 4.5 diameter
H-SGRC-520
Replacement Filter

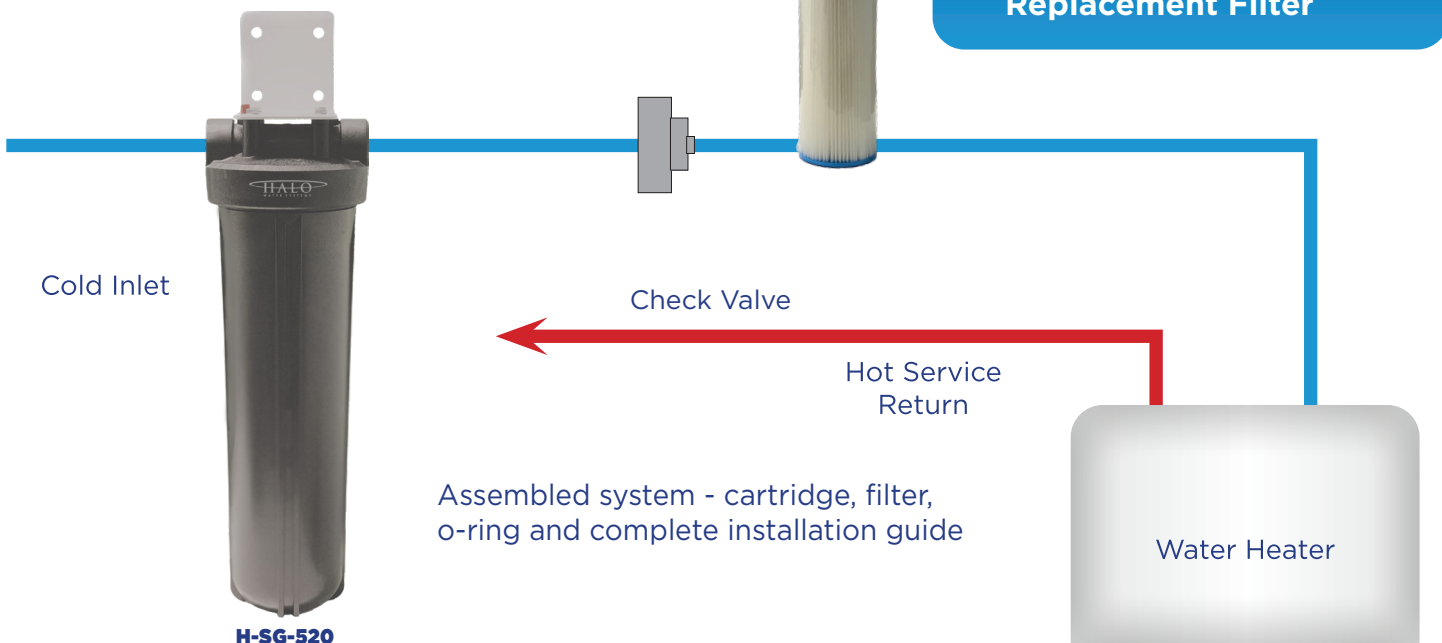

Assembled system - cartridge, filter, o-ring and complete installation guide